

SEAC60W

295-305W

2mm+2mm
Thickness

18.5%
Max efficiency

30years
Warranty



Assemble with thinner and lighter glass in only 2mm



Great heat dissipation by replacing backsheet with glass to increase power generation



Encapsulate with POE, lower waterpermeability, to avoid delamination



Fully symmetrical structure to prevent micro crack



Class A fire protection lead to better flame resistance, ideal for rooftop system




30-year linear performance warranty ensure higher ROI of the power plant

Dual-glass solar module linear warranty

Conventional solar module linear warranty
Dual-glass solar module linear warranty

12years product warranty / 30years performance warranty

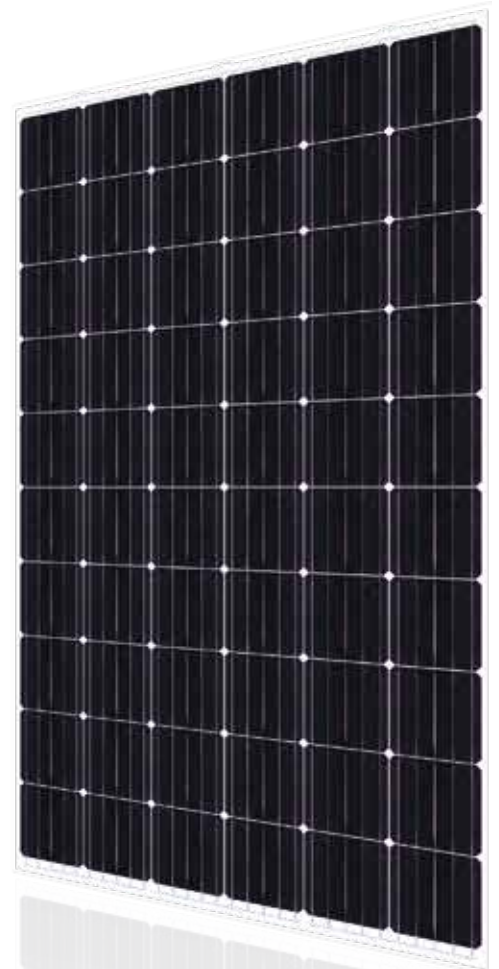

60100160800

1. 江苏天合光能有限公司

Add: 639 Qinglong East Road, Changzhou, 213000 Jiangsu, PEOPLE'S REPUBLIC OF CHINA

2. ALD ADEN D ENA FZE

Add: Plot O4-001, Dubai Silicon Oasis, Dubai, UAE

3. GuiAn New District Almaden Photoelectric material Co., Ltd

Add: 28# South Park of highend equipment manufacturing industry park, GuiAn New District, Guiizhong, China




SEAC60W

295-305W



DUAL GLASS MODULE

I-V & P-V Curve

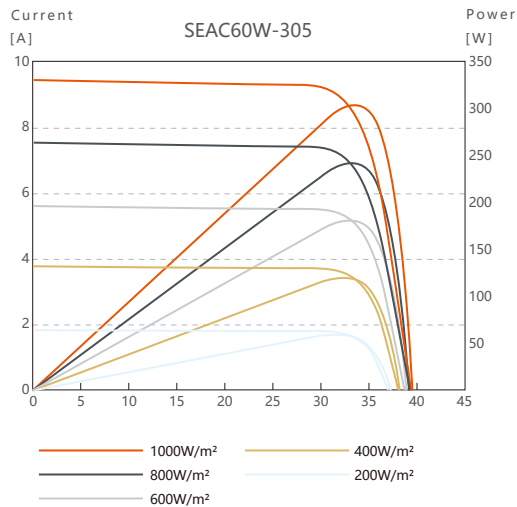


ELECTRICAL SPECIFICATION (STC)

Module	SEAC60W -295	SEAC60W -300	SEAC60W -305
Rated Power (Pmpp) (W)	295±3%	300±3%	305±3%
Rated Current (Imp) (A)	9.04	9.13	9.18
Rated Voltage (Vmpp) (V)	32.64	32.89	33.23
Short Circuit Current (Isc) (A)	9.64±3%	9.68±3%	9.73±3%
Open Circuit Voltage (Voc) (V)	39.48±3%	39.58±3%	39.77±3%
Efficiency(%)	17.9	18.2	18.5
Operational Temperature	-40~+85°C		
Designed Mechanical Load	2400/1600Pa		
Maximum System Voltage	1500V		
Maximum Over-current Protection Rating	20A		

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

DIMENSION(mm)

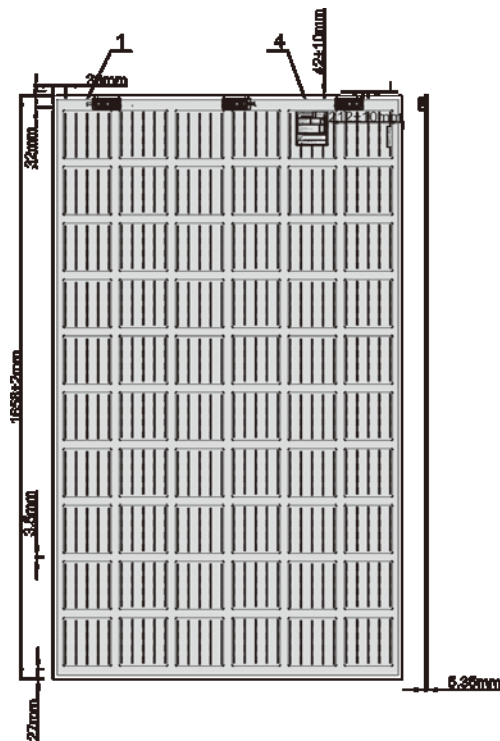

ELECTRICAL DATA (NOCT)

Maximum Power (Pmax) (W)	221.29	224.98	228.16
Maximum Power Voltage (Vmp) (V)	30.44	30.70	30.97
Maximum Power Current (Imp) (A)	7.27	7.33	7.37
Open Circuit Voltage (Voc) (V)	37.06	37.14	37.20
Short Circuit Current (Isc) (A)	7.76	7.79	7.83

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL SPECIFICATION

Cell Type	Perc Mono-crystalline
Cell Orientation	156.75mm × 156.75mm
Module Dimensions	1658mm × 992mm × 5mm (J-box and edge sealing not included)
Weight	20.0kg
Front Glass	2mm tempered AR glass
Encapsulant	POE
Back Glass	2mm ceramic coated glass
Junction Box	IP68 (three bypass diodes)
Cable	4mm ²
Connector	Z4S-abcde

TEMPERATURE COEFFICIENT

NOCT(Nominal Operating Cell Temperature)	45±2°C
Temperature Coefficient of Isc	+0.0484%/°C
Temperature Coefficient of Voc (β)	-0.2883%/°C
Temperature Coefficient of Pmpp (γ)	-0.3797%/°C

PACKAGING CONFIGURATION

Modules per box	33 pieces
Modules per 40' container	858 pieces

* Declaration:

The technical specifications in this document may be slightly biased and Amaden does not guarantee its complete accuracy. Due to continuous technological innovation and product optimization, Amaden reserves the right to adjust the specification in this document at any time without prior notice. When signing a contract, the client should obtain the latest product datasheet as part of a binding contract.